

# CPSG150 Diesel Generator Set

## CPSG150

Voltage: 480/277 V

Frequency: 60Hz



Genset Image for illustration purposes only

### Technical data

Standby Power (ESP)	kVA	204
	kW	163
Prime Power (PRP)	kVA	186
	kW	149
Rated current 3ph (PRP)	A	224
Mechanical structure		Soundproofed
Engine		CUMMINS 6CTA8.3-G2
Alternator		ATLASCOPCO ACA270F
Control card		DEEP SEA 4510mkII - Qc1112
Measures (L x W x H)	mm	3410 x 1250 x 2224
Empty weight	kg	2394
Fuel tank	L	520
Acoustic pressure, LpA	dB(A) @ 7m	75
Acoustic power LwA	dB(A)	104

Voltages	Prime Power (PRP)			Standby Power (ESP)	
	(kVA)	(kW)	(A)	(kVA)	(kW)
208	186	149	517	204	163
220	186	149	489	204	163
380 / 220	121	97	184	133	106
440 / 254	186	149	244	204	163
480 / 277	186	149	224	204	163

* 380 / 220	186	149	283	204	163
-------------	-----	-----	-----	-----	-----

#### Notes:

PRIME POWER: Electrical power data available at a variable load without limits of hours per year. An overload of 10 % is allowed for 1 hour of every 12. In accordance with ISO 8528/1 (2005) – PRP

STANDBY POWER: Electrical power data at variable load in an emergency in accordance with standard ISO 8528/1 (2005) – ESP. Overloads of emergency power are not allowed.

The standard reference conditions are: 25 °C, 100 kPa and 30% relative humidity. Diesel density: 0.835 g/cm<sup>3</sup>.

\* 380 / 220 V dedicated alternator with special winding for 380V 60Hz.

People.  
Passion.  
Performance.



## General description

Specifically developed for the industrial applications, this soundproof generator set is easy to use and straightforward to maintain. The available features & options are designed to fully meet the requirements of all industrial applications. The generator set will automatically start on mains failure and cool down and stop as soon as the mains come back. The generator set also controls the load transfer between mains (utility) and generator set. It can also be start-up by means of an external signal.

It's your solution for Predictable Power.

## Engine

6CTA8.3-G2 CUMMINS diesel 4 stroke engine, with turbo, with direct injection and electronic regulation of the engine speed.

<b>Engine brand</b>	CUMMINS	<b>Engine Capacity (l)</b>	8.3
<b>Model</b>	6CTA8.3-G2	<b>Bore (mm)</b>	114
<b>R.P.M.</b>	1800	<b>Stroke (mm)</b>	135
<b>Fuel</b>	Diesel	<b>Compression ratio</b>	17.3:1
<b>No. of cylinders</b>	6 L	<b>Type of regulation</b>	Electronic Governor

## Cooling System

Cooling of the sleeves using cooling fluid comprised of water and glycol at 50% in a closed circuit driven by the engine pump.

The circuit is completed with a blower fan driven by the engine, radiator, expansion tank, cooling fluid purge system towards the outside of the bedplate and protections of all the running surfaces.

<b>Cooling type</b>	Water	<b>Limit ambient temperature (°c)</b>	50
<b>Coolant capacity (l)</b>	33		

Coolant heater with heating element is available as an option. An adjustable thermostat is included to maintain the temperature at optimum range and facilitate the starting of the engine.

<b>Coolant heater power (W)</b>	1 x 1000W		
---------------------------------	-----------	--	--

## Lubrication System

The lubrication system of this diesel engine comprises the oil pan, oil filter, oil switch and gear oil pump driven by the engine. All the components are original from the engine manufacturer.

It can be completed by an optional manual oil sump drain pump.

<b>Oil capacity (l)</b>	27.6		
-------------------------	------	--	--

## Air intake system

Air intake system for combustion with filtering device and filter change indicator; originals from the engine manufacturer. Intake air cooling after the turbo by means of an air/air exchanger.

<b>Intake air flow (m<sup>3</sup>/min)</b>	11.52		
--	-------	--	--

## Exhaust System

The exhaust system consists of pipes, bellow, interior and exterior aluminized steel exhaust silencer that is highly resistant to corrosion, rain cap and hot part protections.

<b>T<sup>a</sup> gas emission (°C)</b>	536	<b>Engine Capacity (l)</b>	8.3
<b>Gas flow (m<sup>3</sup>/min)</b>	31.26	<b>Outlet diameter (")</b>	
<b>Number of exhaust</b>	1		

## Start System

Start system that uses an electrical motor, battery and battery charge alternator that is driven by the engine itself. The start motor and the battery charge alternator are originals from the engine manufacturer.

<b>Starter voltage system (V)</b>	24	<b>Battery type</b>	2 x 12V 120Ah
-----------------------------------	----	---------------------	---------------

## Fuel supply system

The fuel system consists of a fuel tank, feed pump, water separator fuel filter including 30 microns filtering element, injection pump and injection nozzles.

The fuel tank is made from plastic to prevent rust and includes a filling connection with cap and key, a cleaning hatch and draining plug for easier maintenance. The fuel level is controlled thanks to a fuel level sensor with an analogue gauge mounted in the control cubicle.

<b>Fuel tank capacity (L)</b>	590
-------------------------------	-----

## Fuel consumption panel

(range according to the standard configuration)

Load	Prime Power (PRP)		Standby Power (ESP)	
	(l/h)	Range (h)	(l/h)	Range (h)
0%	7.75	76	7.75	76
50%	21.75	27	23	26
75%	29.37	20	31.67	19
100%	37.76	16	39.95	15

## Alternator

Atlas Copco alternator with 4 poles, with a lifetime lasting greased bearing, H class insulation, without brushes, 2/3 pitch and AVR (Automatic Voltage Regulator)

Protection of all the windings by means of 2-part high quality polyester resin impregnation. The stator windings receive a double impregnation. Final finish with a coat of EG43 varnish.

Shunt excitation system that provides overload of 1,6 times the nominal current. The auxiliary winding as optional with overload capacity 3 times the nominal current for 20 s.

Joining of engine and alternator through flexible disc coupling.

**Regulations:**

- IEC 34-1
- GB 755
- EN 60034
- VDE 0530
- BS 5000
- NEMA MG1-22
- ISO 8528:3

**Low wave distribution:**

- THC < 5%
- THD < 5%
- THF (IEC) < 2%
- TIF (NEMA) < 50

Incorporates electromagnetic emissions suppressor in accordance with standard VDE 0875, class K.

<b>Engine brand</b>	Atlas Copco	<b>Voltage Stability</b>	±1%
<b>Model</b>	ACA270F	<b>Performance at 75% p.f. 0.8 (%)</b>	92.5
<b>Alternator Power (kVA)</b>	180	<b>Performance at 100% p.f. 0.8 (%)</b>	92.5
<b>Number of wires</b>	12	<b>Direct subtransient reactance X''d (%)</b>	0.12
<b>IP Alternator</b>	IP 23	<b>Subtransient time constant, T''d (ms)</b>	0.012
<b>Excitation system</b>	SHUNT	<b>Zero sequence reactance, Xo (%)</b>	0.08
<b>AVR model</b>	SX460	<b>Short-circuit ratio, Kcc</b>	0.45

**Bed plate**

The engine-alternator set is coupled to the bedplate by means of anti-vibration shock mounts that absorb almost all the vibrations.

The base frame is able to hold 100% of the liquids of the genset, reducing any potential environmental impact. It has a drainage plug.

**Sound proofed canopy**

The canopy includes an external access to the lifting beam and push to close latches with key. The lifting beam is available as an option.

It is lined inside with a noise-absorbing material of polyurethane foam with a 30 mm thick waterproof protector veil with a density of 25 kg/m<sup>3</sup>.

It also has an emergency shutdown pushbutton that is accessible from the outside.

**Electric panel**

Easily accessed control cubicle integrated in the generator set with digital controller providing advanced engine monitoring and protection features. Performance and maintenance requirements can also be observed. The cubicle includes multi-poles thermal-magnetic protection circuit breaker against overloads and short-circuits.

Has a circuit breaker, manually actuated, with thermal-magnetic protection against overloads and short-circuits.

<b>Circuit Breaker rated current (A)</b>	280A 4P R	<b>Battery charger</b>	DSE 9255 - 24V 5A
--	-----------	------------------------	-------------------

Has a DEEP SEA battery charge maintainer, designed to be permanently connected to the battery and maintains it charged to its maximum capacity.

Has no moving parts. The charger switches to floating mode when the charge is complete

## Control Card

DEEP SEA control plate, DSE 4510 (Qc1112) monitors the generator set start-up and shutdown process as well as the proper operation of all the components. The generator set can also be start-up by means of an external signal. It also starts-up the generator set using an external signal.

Also, control plate DSE 4620 checks a large number of parameters of the generator set which allows it to display information, statuses and alarms. If required, it will shutdown the generator set: Due to high coolant fluid temperature, low oil pressure, low coolant fluid level, etc.

Includes a LCD screen with lighting, 2 navigation menu buttons, independent operational mode buttons, and alarms and status indicating LEDs.

Communications via USB, and Completely configurable using a PC in Windows environment and free Scada type

Includes reading and displaying of parameters with RMS values, real time clock, events history log up to 15 events and programming of alarms, events, start-ups and shutdowns.

Operating modes: START-UP, SHUTDOWN, AUTO, MANUAL AND TEST.

### Generator

- Generator voltage (L-N)
- Generator voltage (L-L)
- Generator frequency
- Generator current
- kW
- kVA
- kWh
- kVAh
- Power factor



### Engine

- Turn speed
- Cooling fluid temperature
- Oil pressure
- Hour meter
- Battery voltage
- No. of start-ups
- Fuel level

### Protections

- Start-up fault (generator set shutdown)
- High coolant temperature (alarm and generator set shutdown)
- Low oil pressure (alarm and generator set shutdown)
- Low fuel level (alarm)
- Low cooling fluid level (generator set shutdown)
- Overload (alarm and generator set shutdown)
- Battery voltage high (alarm)
- Battery voltage low (alarm)
- Battery charge alternator failure (alarm)
- Generator low frequency (alarm and shutdown)
- Generator high frequency (alarm and shutdown)
- Generator low voltage (alarm and shutdown)
- Generator high voltage (alarm and shutdown)
- External emergency shutdown (shutdown)
- Engine overspeed (shutdown)
- Maintenance interval (alarm)

## PTB

Optional Cabinet for switching between the grid and the generator set by means of Socomec brand power transfer

Allows for the padlock locking function. Includes a Manual / Automatic mode selector and emergency manual control.

Safety switching for isolating the loads. High dynamic resistance against short-circuits.


Position indicator with fully visualized cut-off. Stable positions not affected by changes in voltage and mechanical

vibrations. External electrical control of the positions and test sequences.

<b>PTB</b>	4P 315A 160-333V L-N 50-60Hz
------------	------------------------------

## Dimensions and weight

<b>Length, L (mm)</b>	3410	3410	NA
<b>Width, A (mm)</b>	1250	1250	NA
<b>Height, H (mm)</b>	2224	2407	NA
<b>Net Weight (kg)</b>	2394	2537	NA
<b>Capacity Fuel Tank (l)</b>	520	900	NA

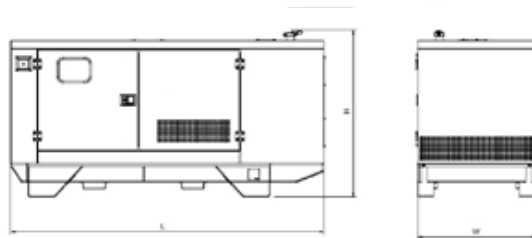

## Performance class

Execution class in accordance with ISO 8528/5 (2005) taking into account the behaviour of the generator set in a permanent mode of operation with different load levels, as well as in a temporary mode of operation due to

<b>Performance class</b>	G2
--------------------------	----

## Applicable international regulations:

- ISO 8528
- ISO 3046
- BS 5000
- IEC 60034